


HEAD DIMENSIONS

100° Flat Undercut Truss Six-Lobe

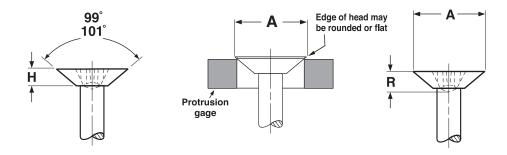

PHILLIPS UNDERCUT 100° FLAT HEADS FOR MACHINE SCREWS												
Nominal Size	А		н		R		Phillips Driver Size					
	Head Diameter		Head Height		Recess Depth							
	Max	Min	Max	Min	Max	Min						
4	.212	.188	.047	.038	.071	.055	1					
6	.262	.235	.059	.048	.067	.044	2					
8	.312	.282	.070	.058	.095	.072	2					
10	.362	.329	.081	.068	.110	.087	2					
12	.412	.375	.092	.077	.104	.081	3					
1/4	.476	.437	.118	.101	.118	.095	3					





SIX-LOBE TRUSS HEADS												
Screw Size	D		Н		R	G		Driver Size				
		Head Din	nensions		Re							
	Head Diameter		Head Height			Gauge	(Fallaway)					
	Max	Min	Max	Min	Ref	Penetration Min	Max Penetration					
4*	.257	.241	.069	.059	-	-	-	T9				
6	.321	.303	.086	.074	.111	.045	.022	T10				
8	.384	.364	.102	.088	.132	.045	.026	T15				
10	.448	.425	.118	.103	.155	.055	.031	T20				
12	.511	.487	.134	.118	.178	.070	.036	T25				
1/4	.573	.546	.150	.133	.200	.070	.040	T27				
5/16	.698	.666	.183	.162	.266	.080	.047	T40				
3/8	.823	.787	.215	.191	.312	.110	.055	T45				

^{*}Dimensions for the #4 diameter Six-Lobe Truss head are independent of ASME B18.6.3