


ISO 7045 Pan Phillips
Helical Split L/W

SEMS

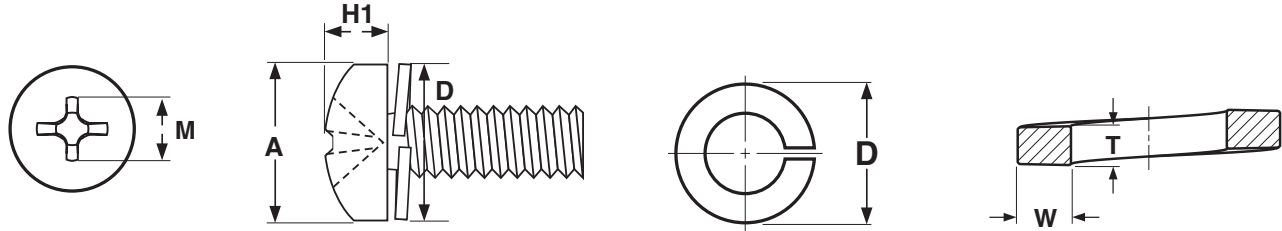

METRIC - ISO 7045 PAN PHIL SPLIT LOCKWASHER SEMS											ISO 7045 ASME B18.13.1M
Machine Screw Dimensions							Split Lockwasher Dimensions				Phillips Driver Size
Nominal Size	Thread Pitch	A		H1		M	D		T	W	
		Head Diameter		Height of Head		Recess Diameter	Outside Diameter		Thickness	Width	
		Max	Min	Max	Min	Ref	Max	Min	Min	Min	
M2	0.4	4	3.7	1.6	1.46	2.2	3.7	-	0.60	-	1
M2.5	0.45	5	4.7	2.1	1.96	2.70	4.81	4.60	0.79	1.19	1
M3	0.5	5.6	5.3	2.40	2.26	3	5.73	5.49	1.02	1.40	1
M4	0.7	8	7.64	3.1	2.92	4.4	7.00	6.74	1.19	1.57	2
M5	0.8	9.5	9.14	3.7	3.52	4.9	8.34	8.08	1.42	1.78	2
Tolerance on Length						over 3mm to 6mm			± 0.24		
						over 6mm to 10mm			± 0.29		
						over 10mm to 18 mm			±0.35		
						over 18mm to 30 mm			±0.42		

Description	A cross-recessed, pan head machine screw with a free-spinning, captive, helical split lockwasher.	
Applications/ Advantages	The washer/screw assembly makes this a locking screw with the washer providing the locking action. Machine pre-assembly provides cost savings to the end user. The split lockwasher variety is preferred for use with hardened bearing surfaces.	
Material	Steel	Stainless
	Screw: C1008 or equivalent carbon steel Washer: Spring Steel	Screw: Class 304 SS Washer: Class 304 SS
Hardness	Screw: Rockwell B 67 minimum Washer: HV 430 - 530	-
Tensile Strength	400 N/mm ² (applies to screws with a minimum nominal length of 2.5d (where d is the nominal diameter of the screw))	-
Plating	Sems are available in a clear zinc finish and baked after plating.	Stainless sems are usually supplied without a secondary finish.