


SELF- TAPPING SCREWS

DRYWALL SCREWS, TRIM HEAD

Square Drive,
Type-17 Point

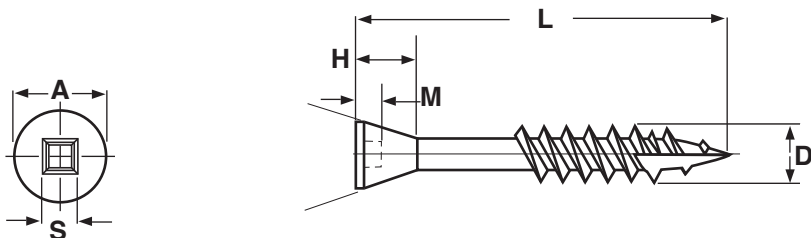

TRIM HEAD SQUARE RECESS DRYWALL SCREWS WITH TYPE-17 POINT							
Nominal Size & Threads per Inch	A		M		D		Drive Size
	Head Diameter		Square Recess Depth		Thread Diameter		
	Max	Min	Max	Min	Max	Min	
7-10	0.236	0.223	0.067	0.058	0.168	0.161	#1
Tolerance on Length			All lengths		±0.03		

Description	A screw with a coarse thread, extra sharp point with a chip cavity, square socket recess and countersunk flat head of a width 1/3 less than a standard bugle drywall screws.
Applications/ Advantages	For attaching wood trim or railing to fences. Type-17 point minimizes the chances of splitting wood. Stainless material offers superior resistance to corrosion. The square drive variety is preferred when greater torque is required during installation.
Material	Class 305 or equivalent Stainless Steel
Finish	Screws are typically commercially passivated.